

GP SERIES

3600-8000

WATT PORTABLE
GENERATORS

GENERAC®



**FEATURING
COSENSE®
TECHNOLOGY**



Affordable reliability. Industry-leading innovation.

GP SERIES

3600-8000

WATT PORTABLE GENERATORS

GP Series portable generators provide reliable power for emergency outages, work, or recreation. The robust design paired with innovative features make these generators ideal for any application.

LARGE-CAPACITY STEEL FUEL TANK
Provides long run-times, paired with an integrated fuel gauge allows for accurate assessment of remaining fuel level

FOLD-DOWN LOCKING HANDLE
For ease in maneuverability and compact storage

POWERRUSH™ ADVANCED TECHNOLOGY
Delivers up to 40% more starting capacity allowing you to do more with less*

GENERAC'S OHV ENGINE
With splash lubrication provides a long engine life

CO-SENSE® TECHNOLOGY
Stops. Alerts. Saves. Powerful protection against hazardous carbon monoxide

HARDENED STEEL-TUBE CRADLE
For added durability and strength

HEAVY DUTY, NEVER-FLAT WHEELS
Allows for easy portability (Handle and Wheel Kit included)




POWERRUSH™



FEATURING COSENSE® TECHNOLOGY

*Increases electrical current upon demand above rated output when starting electric motors. POWERRUSH™ percentage varies by model.

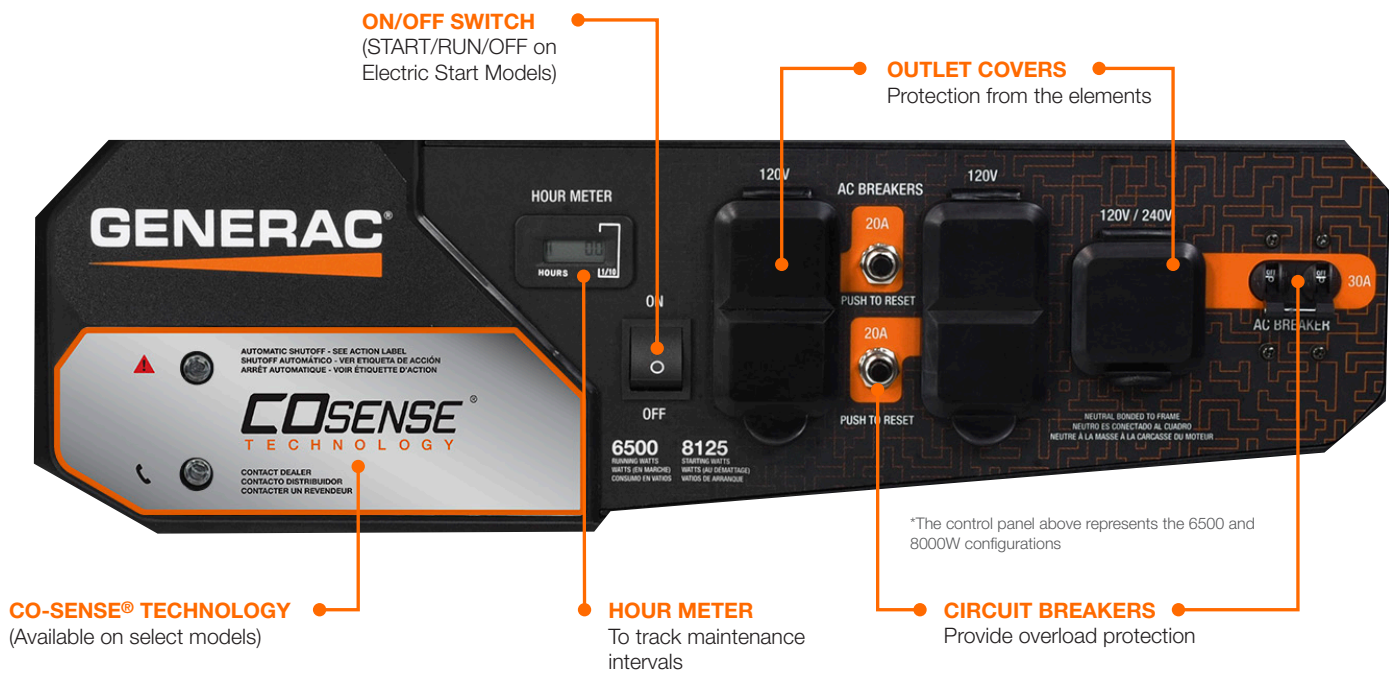

HOW MUCH POWER DO YOU NEED?

Sizing a portable generator is easy. Check out this sample:

- 1 Choose which devices you want to power at the same time.
- 2 Record and add the running watts listed for each device that you need to power.
- 3 Record the starting watts listed for each device.
- 4 Select the one device with the highest starting watts. Add that number to the total running watts to determine the total wattage requirement.

DEVICE	RUNNING WATTS	ADDITIONAL STARTING WATTS	GENERATOR SIZE
Refrigerator	700	2200	Minimum starting watts for your needs ↓ 6750 starting watts
Sump Pump	1050	2150	
Belt Sander	1200	2400	
Circular Saw	1400	2300	
Total	4350	+ 2400 =	

	DEVICE	RUNNING WATTS	ADDITIONAL STARTING WATTS
HOUSEHOLD	Coffee Maker	1500	-
	Computer with a 17" Monitor	800	-
	Electric Range - 8" Element	2100	-
	Electric Water Heater	2000	1000
	Garage Door Opener - 1/2 HP	875	2350
	Microwave - 1000 Watts	1000	-
	Refrigerator/Freezer	700	2200
	Sump Pump 1/2 HP	1050	2150
	Television - 27"	500	-
	Washing Machine	1150	2300
	Well Pump - 1/2 HP	1000	2100
	Central AC - 24,000 BTU	3800	4950
JOBSITE	Furnace Fan Blower - 1/2 HP	875	2300
	Heat Pump	4700	4500
	Window AC - 12,000 BTU	3250	3950
	Air Compressor - 1/2 HP	1000	2000
	Airless Paint Sprayer- 1/3 HP	600	1200
	Belt Sander - 3"	1200	2400
	Circular Saw - 7-1/4"	1400	2300
	Hand Drill - 1/2"	600	900
	Reciprocating Saw	960	-
	Quartz Halogen Work Light	1000	-
RECREATION	Table Saw, 10"	2000	2000
	CD / DVD Player	100	-
	Color TV - 13"	150	-
	Inflator Pump	50	150
	Outdoor Light String	250	-
	Slow Cooker	250	-
	RV Air Conditioner (13,500 BTU)	1500	700

*Watts listed are approximate. Check your appliance for actual requirements. Total wattage requirements assumes intermittent starting of devices.

GP SERIES 3600-8000 WATT PORTABLE GENERATORS

WATT	3600	3600	6500	6500	6500E	6500E	8000E
SPECIFICATIONS							
Model #	7721	7722	7680	7683	7713	7715	7676
Configuration	49ST	50ST	49ST	50ST	49ST/CSA	49ST/CSA	50ST
Running Watts/ Starting Watts	3600/4500	3600/4500	6500/8125	6500/8125	6500/8125	8000/10000	8000/10000
PowerRush™	Yes	Yes	Yes	Yes	Yes	Yes	Yes
CO-SENSE®	Yes	Yes	Yes	Yes	Yes	Yes	Yes
HomeLink™ MTS Compatible	No	No	Yes	Yes	Yes	Yes	Yes
25ft / 20A Generator Cord Included	No	No	No	No	No	No	No
Engine Type	OHV	OHV	OHV	OHV	OHV	OHV	OHV
Engine Displacement	212cc	212cc	389cc	389cc	389cc	420cc	420cc
Starting Method	Recoil Start	Recoil Start	Recoil Start	Recoil Start	Electric/ Recoil Start	Electric/ Recoil Start	Electric/ Recoil Start
Battery Included	N/A	N/A	N/A	N/A	Yes	Yes	Yes
Low Oil Shutdown	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Fuel Capacity (Gallons)	3.7	3.7	7.9	7.9	7.9	7.9	7.9
Run Time @ 50% Load	9.3 hours	9.3 hours	11.5 hours	11.5 hours	11.5 hours	10 hours	10 hours
Hour Meter	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Fuel Gauge	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Rated Voltage	120V	120V	120/240V	120/240V	120/240V	120/240V	120/240V
Outlets (Covered)	(2) 120V 20A 5-20R (1) 120V 30A L5-30R	(2) 120V 20A 5-20R (1) 120V 30A L5-30R	(2) 120V 20A 5-20R GFCI (1) 120V/240V 30A L14-30R	(2) 120V 20A 5-20R GFCI (1) 120V/240V 30A L14-30R	(2) 120V 20A 5-20R GFCI (1) 120V/240V 30A L14-30R	(2) 120V 20A 5-20R GFCI (1) 120V/240V 30A L14-30R	(2) 120V 20A 5-20R GFCI (1) 120V/240V 30A L14-30R
Handle Style	Folding	Folding	Dual Grip with Lock Pin	Dual Grip with Lock Pin	Dual Grip with Lock Pin	Dual Grip with Lock Pin	Dual Grip with Lock Pin
Wheel Type	8" Never Flat	8" Never Flat	9.5" Never Flat	9.5" Never Flat	9.5" Never Flat	9.5" Never Flat	9.5" Never Flat
Dimensions (L" x W" x H")	24" x 22.5" x 21.3"	24" x 22.5" x 21.3"	27.2" x 27" x 26.5"	27.2" x 27" x 26.5"	27.2" x 27" x 26.5"	27.2" x 27" x 26.5"	27.2" x 27" x 26.5"
Product Weight	105 lbs	105 lbs	172 lbs	172 lbs	182 lbs	200 lbs	200 lbs
Warranty - Residential	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited
Warranty - Commercial	2 Year Limited	2 Year Limited	2 Year Limited	2 Year Limited	2 Year Limited	2 Year Limited	2 Year Limited

